
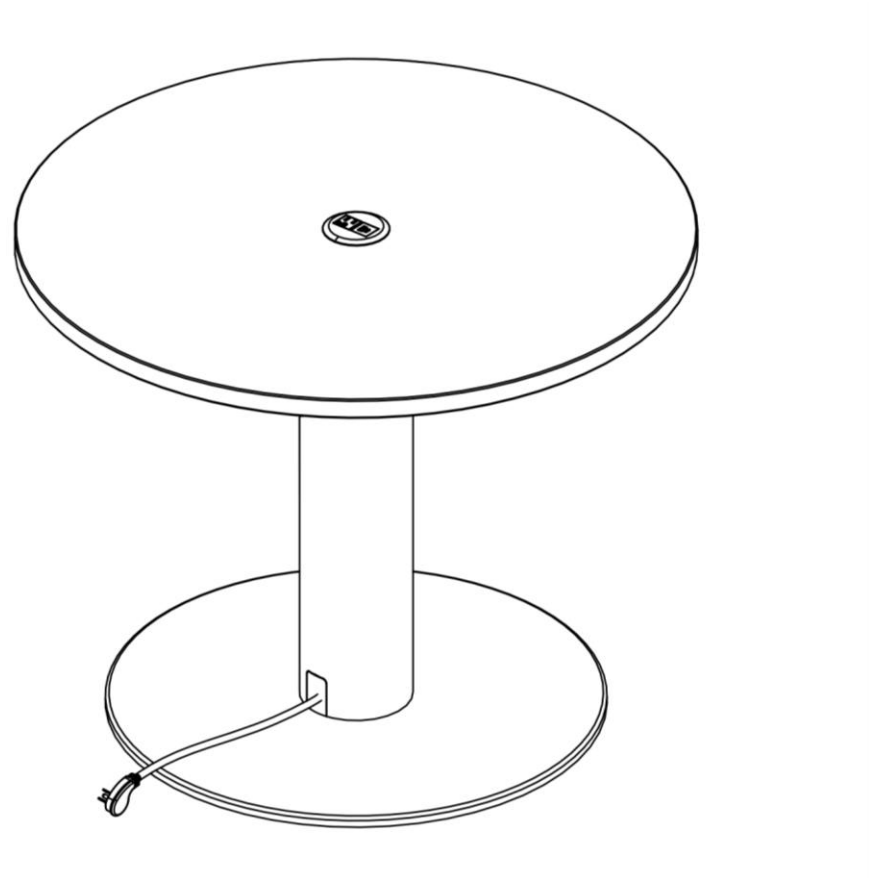



Large Disc Base Installation Instructions

Date	Page No.	Description of change	Name
06-03-2024	1-8	Released	S. Powers
03-02-2026	2	Fixed items P1 & P2	P. Day
09-28-2026	4	Change to spun disc base design	S. Powers




Large Disc Base Installation Instructions Parts List

Item	Replacement Part number	Circle Sheet Number	Description	Image
P1	T-DBSL	RT-DBSL	Disc Base Top	
P2	WFS-DBT26-V2	RWFS-DBT26-V2	Disc Base Bottom	
P3	RH-91255A583	RH-91255A583	Button Head Hex Screw #5/16-18 x 1"	
P4	T-LDBSTxx xx = 16, 29 or 42	RT-LDBSTxx-P xx = 16, 29 or 42	Post Leg 16H, 29H or 42H x 60mm Dia	
P5	RH-SHF51618-1	RH-SHF51618-1	Flat Head Hex Screw 5/16-18 X 1" long	
P6	T-LDBTP	RT-LDBTP	Top Plate 8"x8"	
P7	E-DOCK281-xx BK (black) MS (metallic silver) WH (white)	RE-DOCK281-xx BK (black) MS (metallic silver) WH (white)	Charger Dock 281	
P8	RH-QS0978	RH-QS0978	Flat Head Wood Screw #9 X 7/8" long	

Large Disc Base Installation Instructions

Step 1 (optional – for installing power only):


Knock out mouse holes for routing power cord.

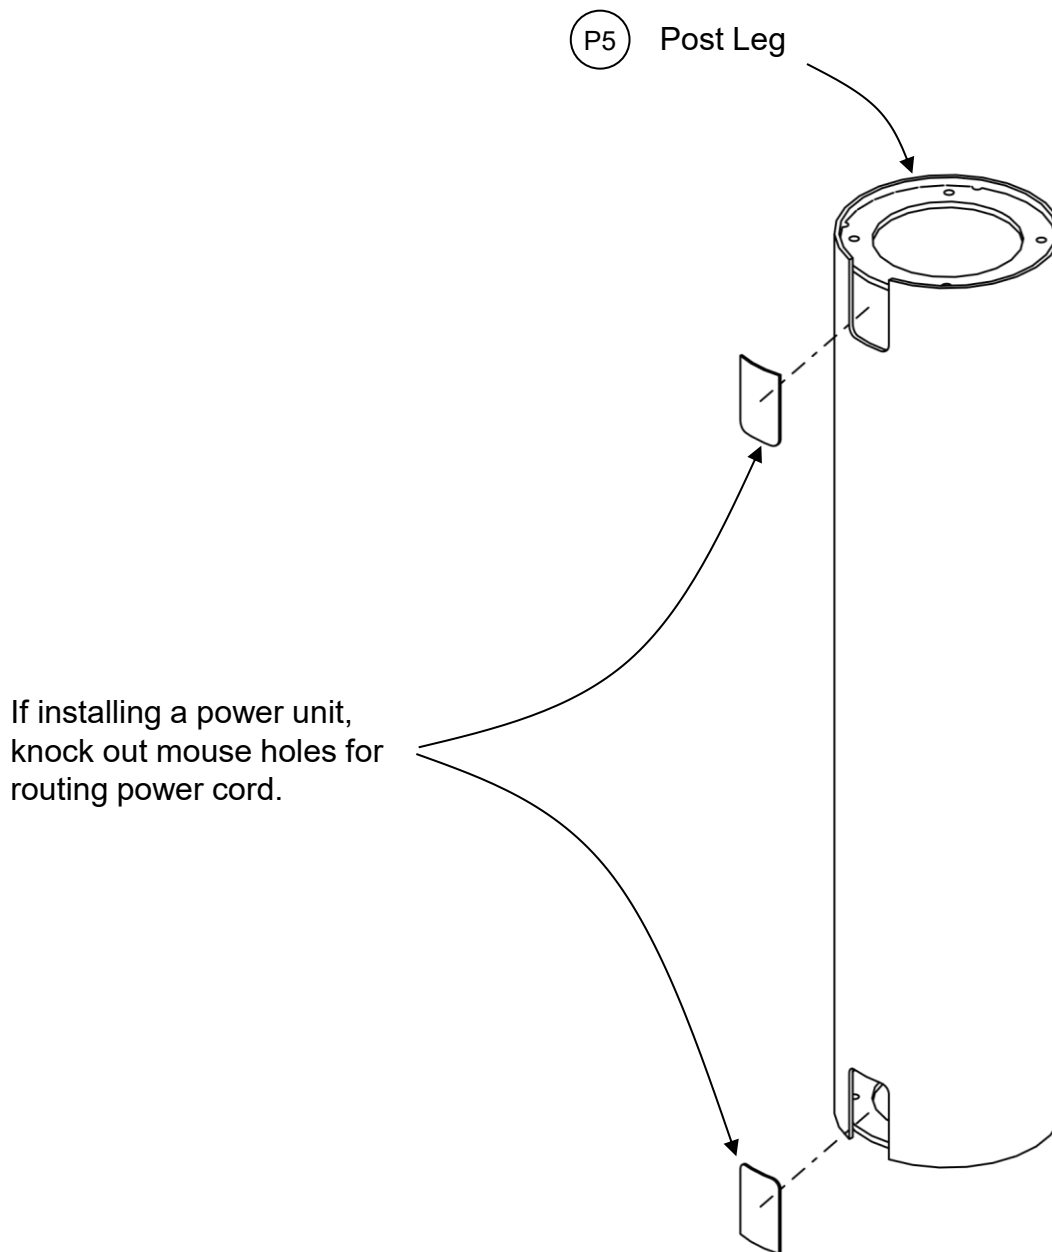

Large Disc Base Installation Instructions

Step 2:


Assemble the two-piece disc base to the post using (4) #5/16-18 x 1" button head screws.

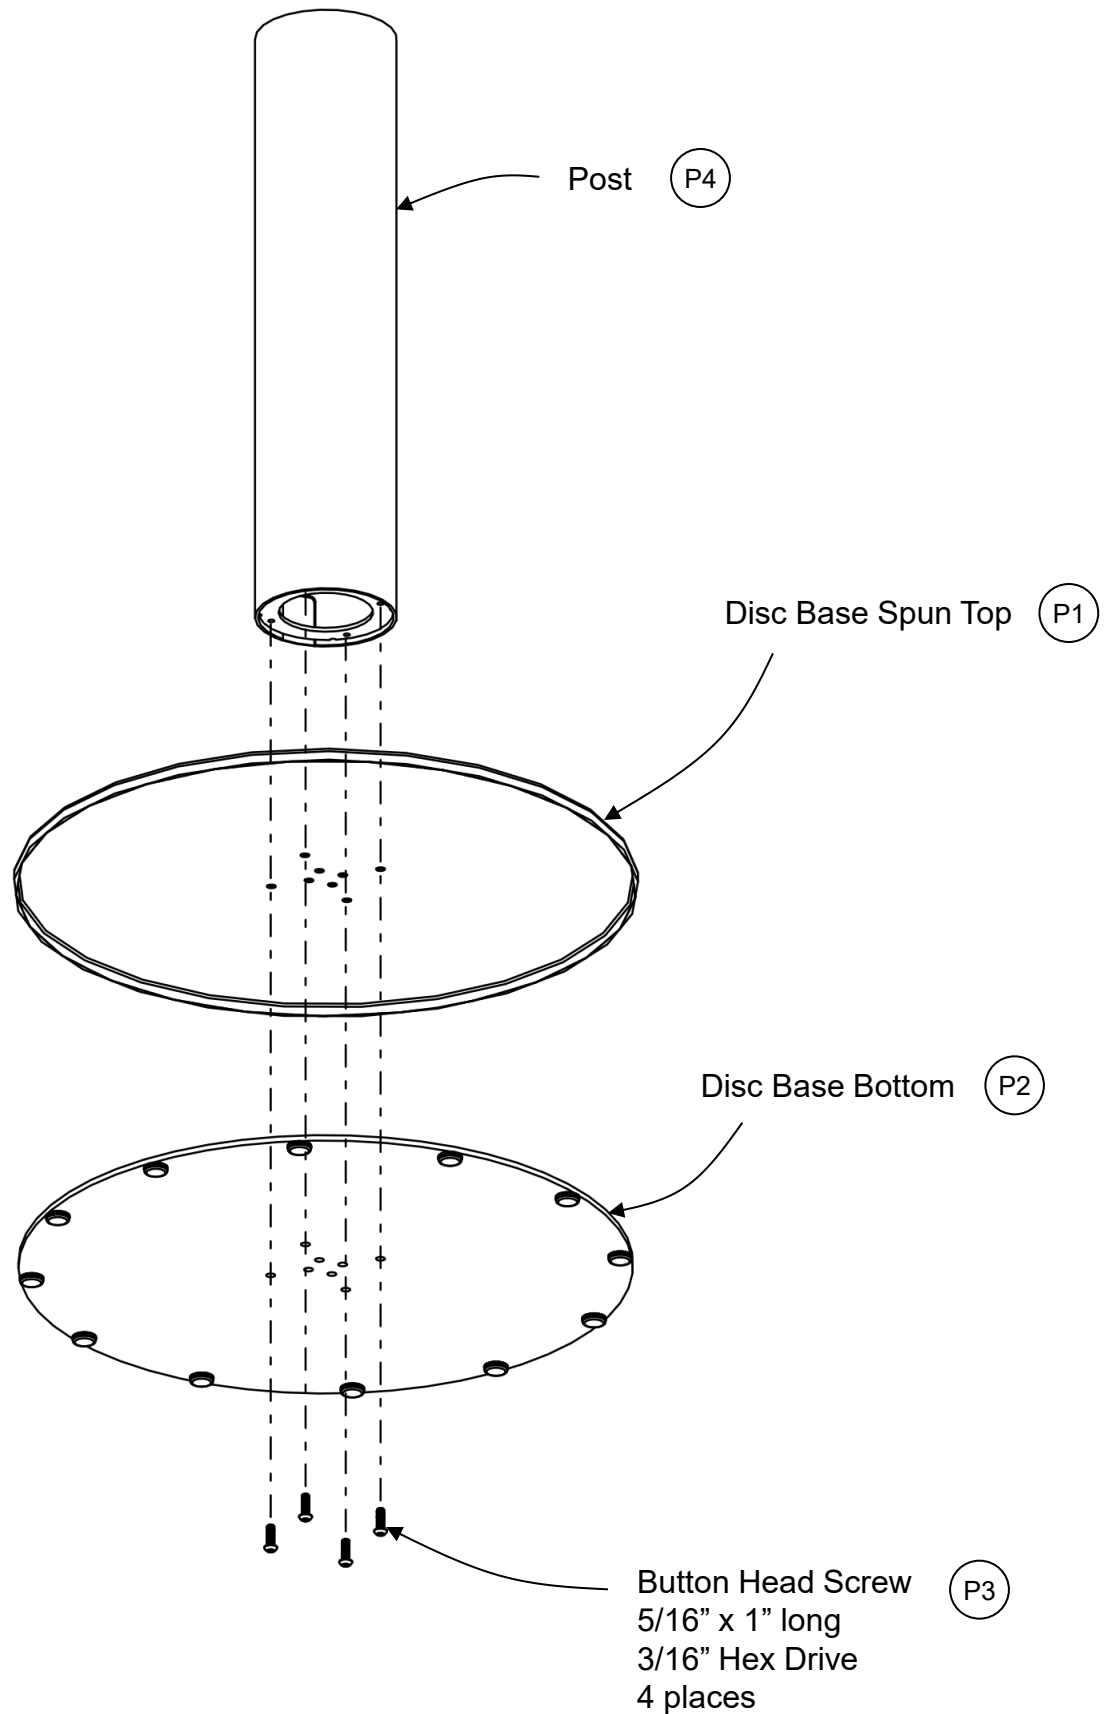

Large Disc Base Installation Instructions

Step 5:


Connect the top plate to the post leg using (4) #5/16-18 x 1" long flat head screws.

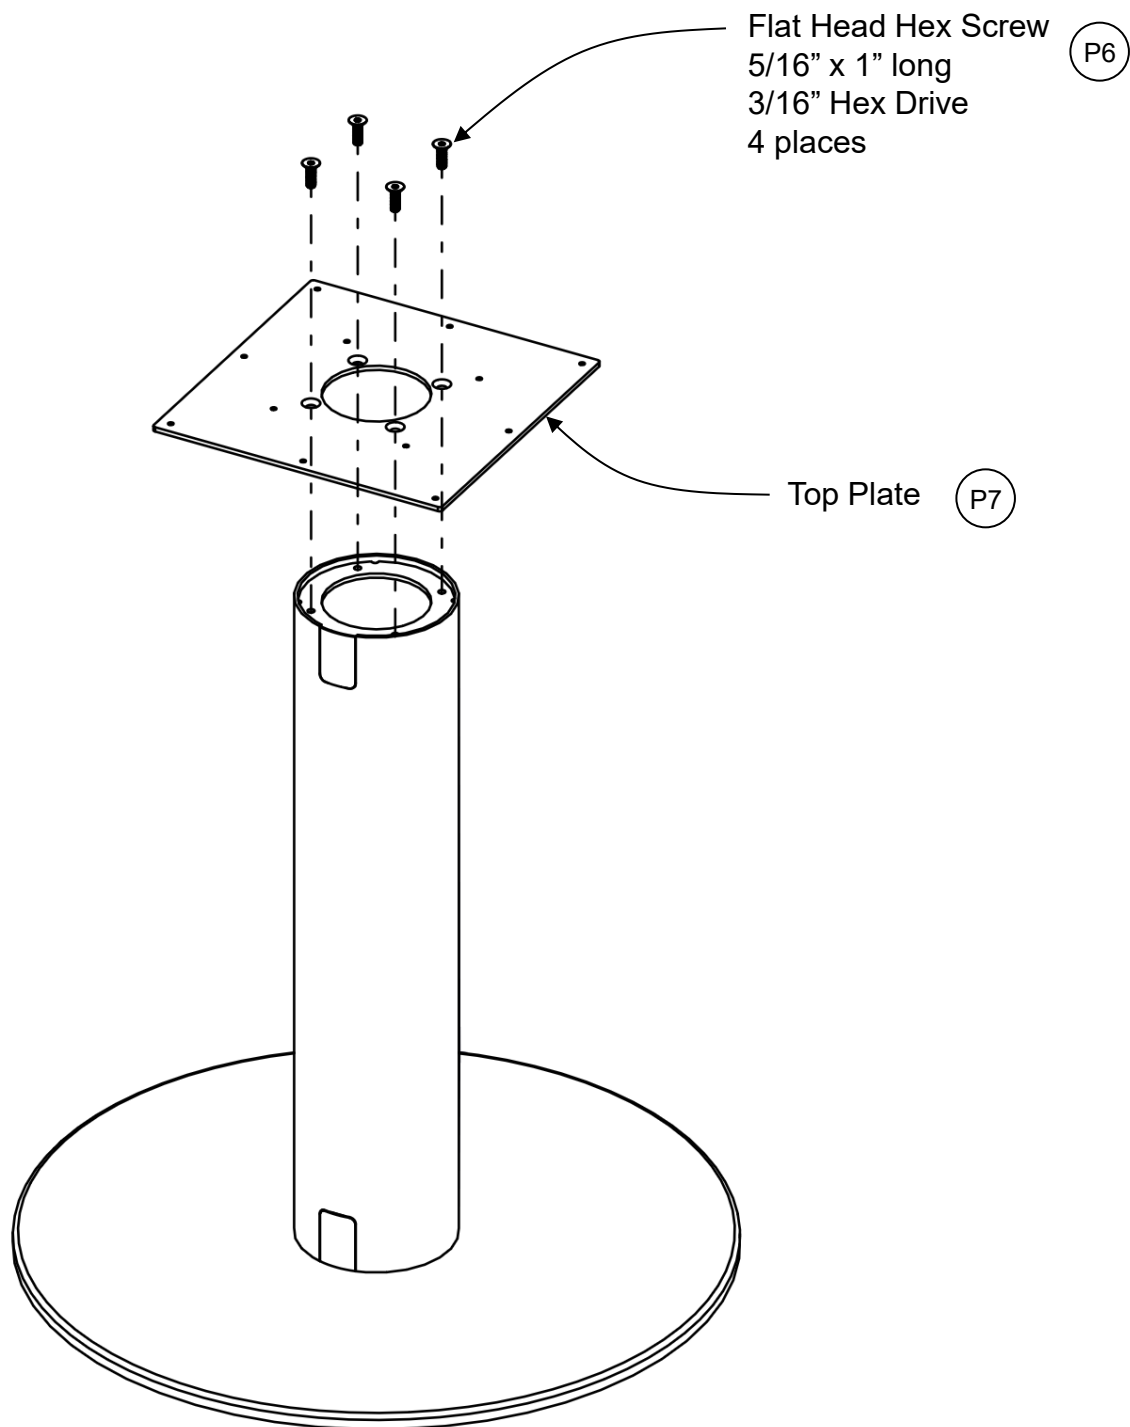

Large Disc Base Installation Instructions


Step 6 (optional – for installing power only):

Install power per instructions E-D200INSTR

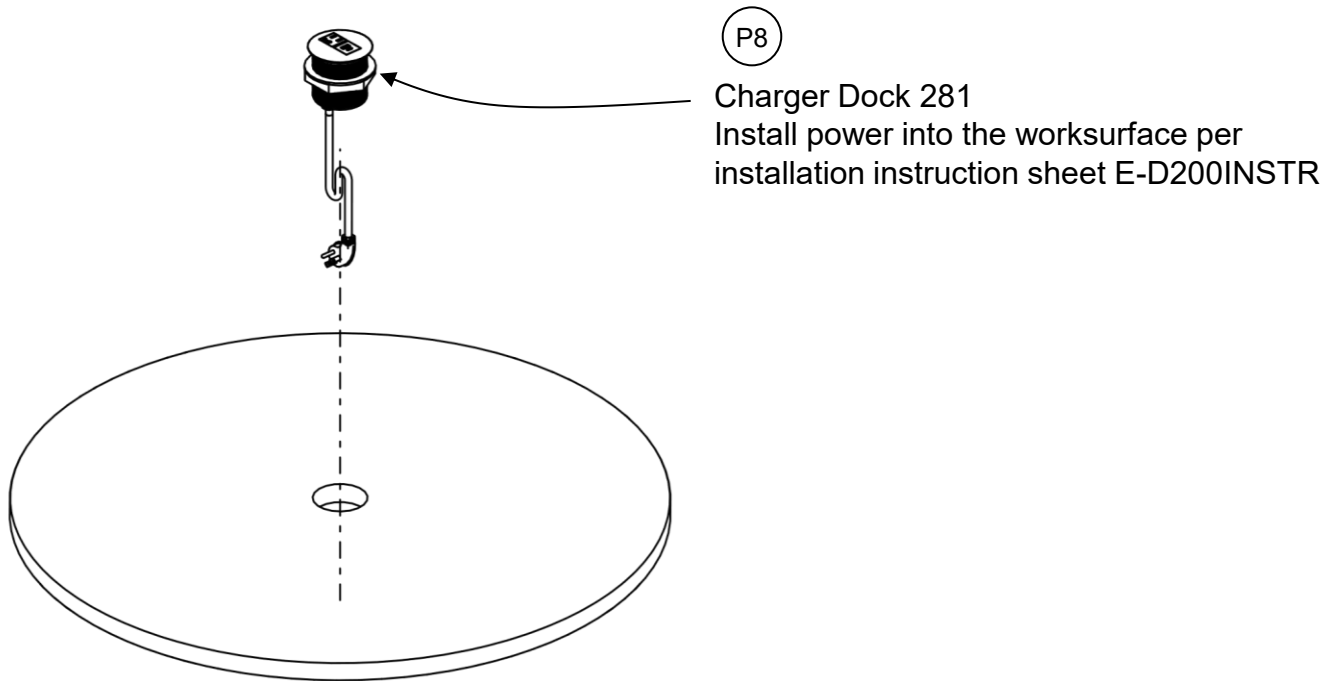

Step 7:

Position worksurface onto the top plate and run power cord down into the post and out through one of the mouse holes.

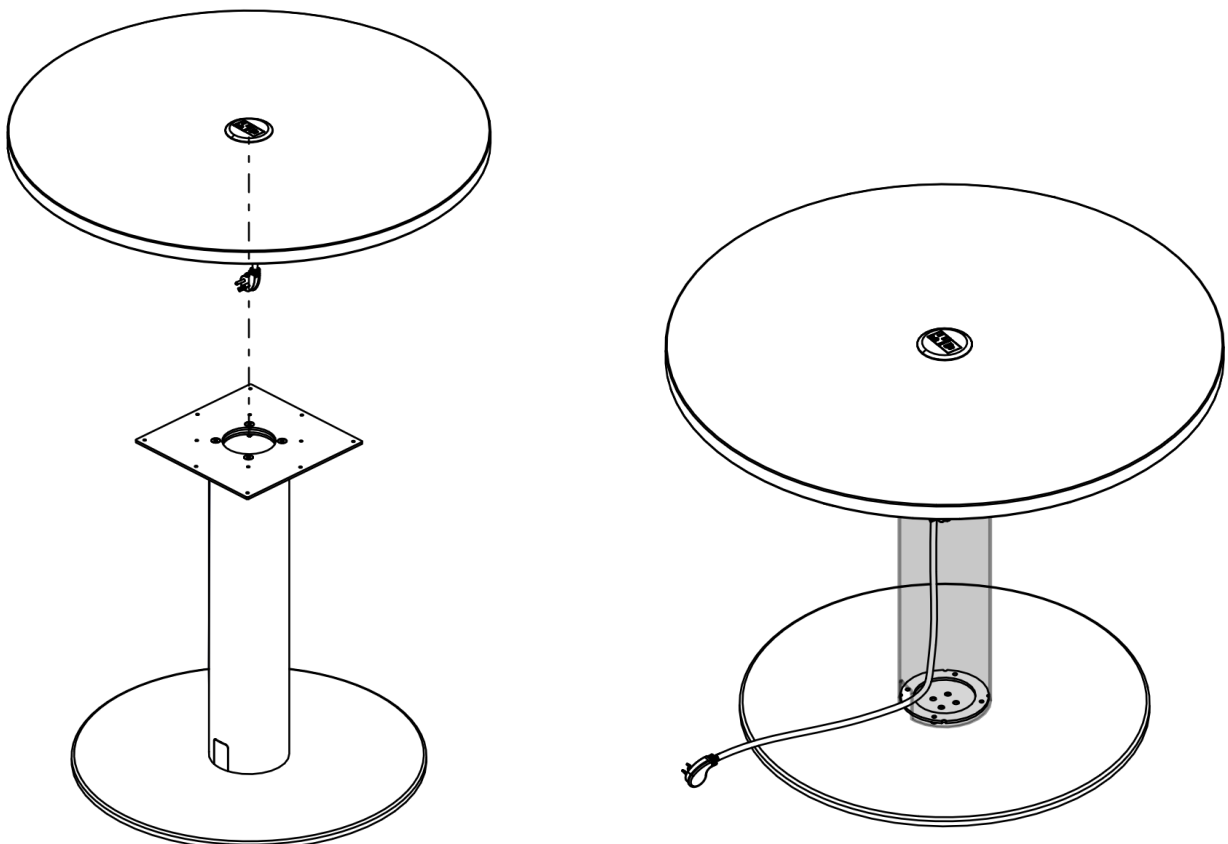

Large Disc Base Installation Instructions

Step 8:

Attach the worksurface to the top plate using #9 x 7/8" wood screws.

